CODE	SL	ST	A	B	C	D	D1	E	F	G	H	A2	B2	C2	D2	P/C
TSL76400	406.4	406.4	88.9	-	-	-	-	-	-	242.9	-	-	-	-	285.7	4
TSL76450	457.2	457.2	88.9	-	-	-	-	-	-	293.7	-	-	-	-	336.5	4
TSL76500	508	508	88.9	152.4	-	-	-	-	-	344.5	-	-	-	-	387.3	4
TSL76550	558.8	558.8	88.9	152.4	-	-	-	-	-	395.3	25.4	-	-	-	438.1	4
TSL76600	609.6	609.6	88.9	152.4	-	-	-	-	360.4	446.1	25.4	-	-	-	488.9	2
TSL76700	711.2	711.2	88.9	152.4	330.2	-	-	-	462	547.7	25.4	-	-	-	590.5	2
TSL76750	762	711.2	88.9	152.4	330.2	-	-	-	512.8	547.7	25.4	215.8	482.5	482.5	590.5	2
TSL76800	812.8	812.8	88.9	152.4	330.2	482.6	-	-	563.6	649.3	-	215.8	-	533.4	692.1	2
TSL76900	914.4	914.4	88.9	152.4	330.2	584.2	-	-	665.2	750.9	-	215.8	-	635	793.7	2
TSL761000	1016	1016	88.9	152.4	330.2	685.8	-	-	766.8	852.5	-	215.8	-	736.6	895.3	2
TSL761100	1117.6	1117.6	88.9	152.4	330.2	685.8	-	787.4	868.4	954.1	-	215.8	-	838.2	996.9	2
TSL761200	1219.2	1219.2	88.9	152.4	330.2	685.8	725.6	787.4	970	1055.7	-	215.8	387.7	937.7	1098.5	2

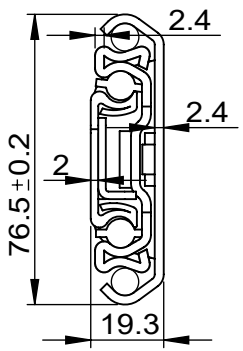

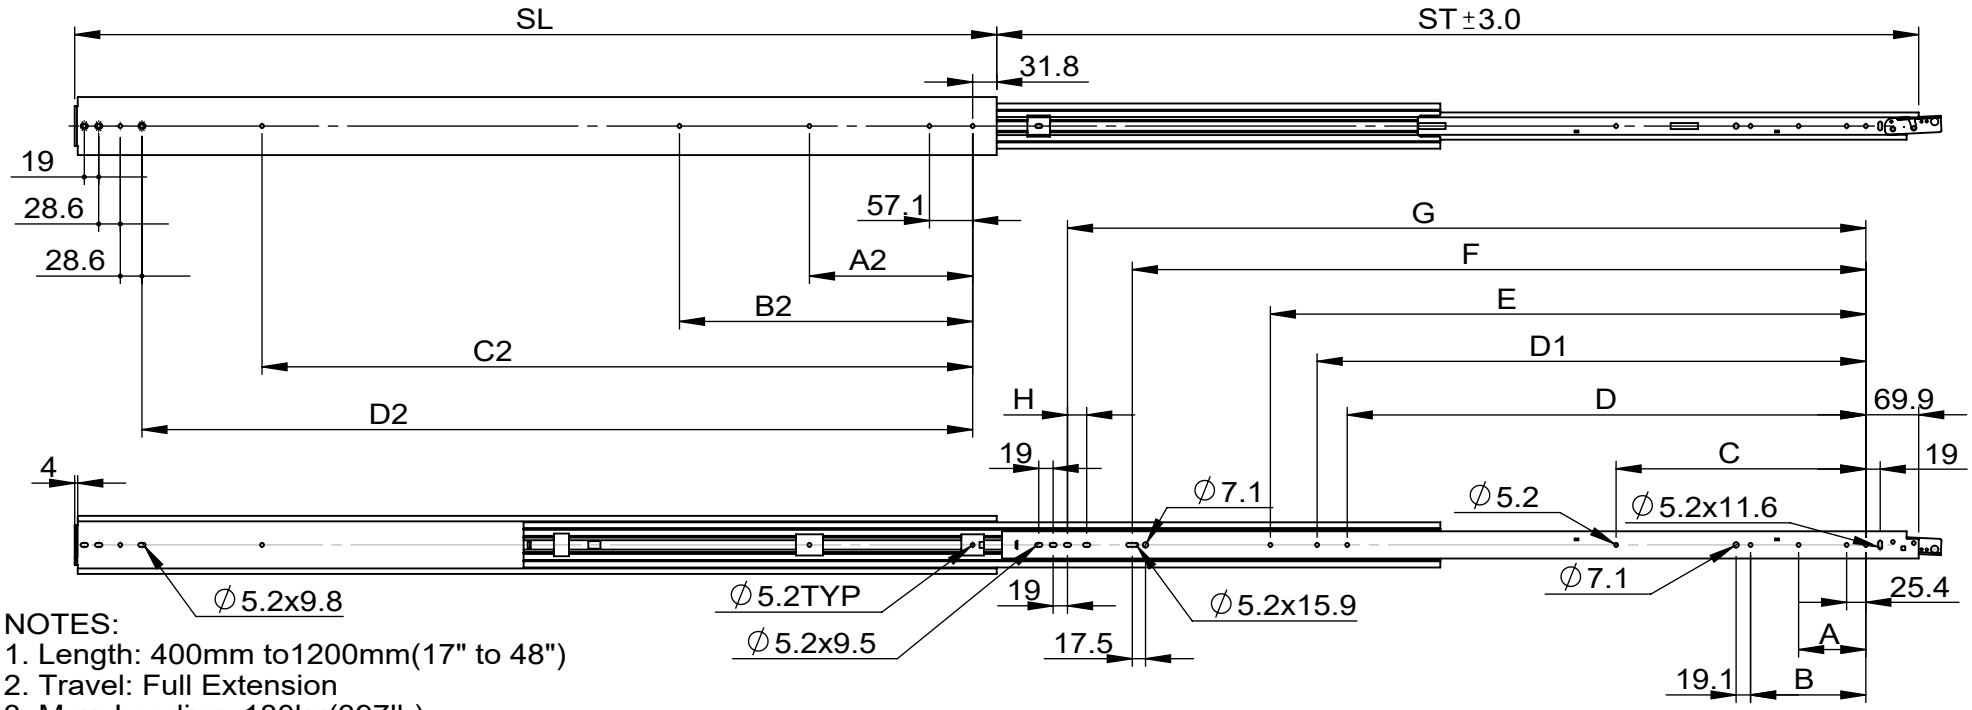

NOTES:
1. Length: 400mm to1200mm(17" to 48")
2. Travel: Full Extension
3. Max. Loading: 180kg(397lb)
4. Mount: Side Mount
5. Function: Lock-in & Out with Handle
6. Finish: Clear Zinc (RoSH)
7. Material: Cold Rolled Steel
8. Packing: Unit Packed in 4pair/carton

中遠國際有限公司 TOOL & TECH INTERNATIONAL CO.,LTD.	Part Number: Series TSL76	Drawn by:	Date:	Material:
	Description:	Checked by:	Projection Method:	Finish:

This drawing and any information or description material set out on it are the confidental and copyright property of TOOL & TECH INTERNATIONAL CO.,LTD.