



| CODE    | SL  | ST  | A   | B   | A2  | B2  | C2 | D2 | P/C |
|---------|-----|-----|-----|-----|-----|-----|----|----|-----|
| GT48350 | 350 | 347 | 96  | 160 | 160 | -   | -  | -  | 15  |
| GT48400 | 400 | 397 | 128 | 192 | 160 | 64  | -  | -  | 15  |
| GT48450 | 450 | 447 | 160 | 192 | 160 | 128 | -  | -  | 15  |
| GT48500 | 500 | 497 | 192 | 224 | 160 | 128 | 64 | -  | 15  |

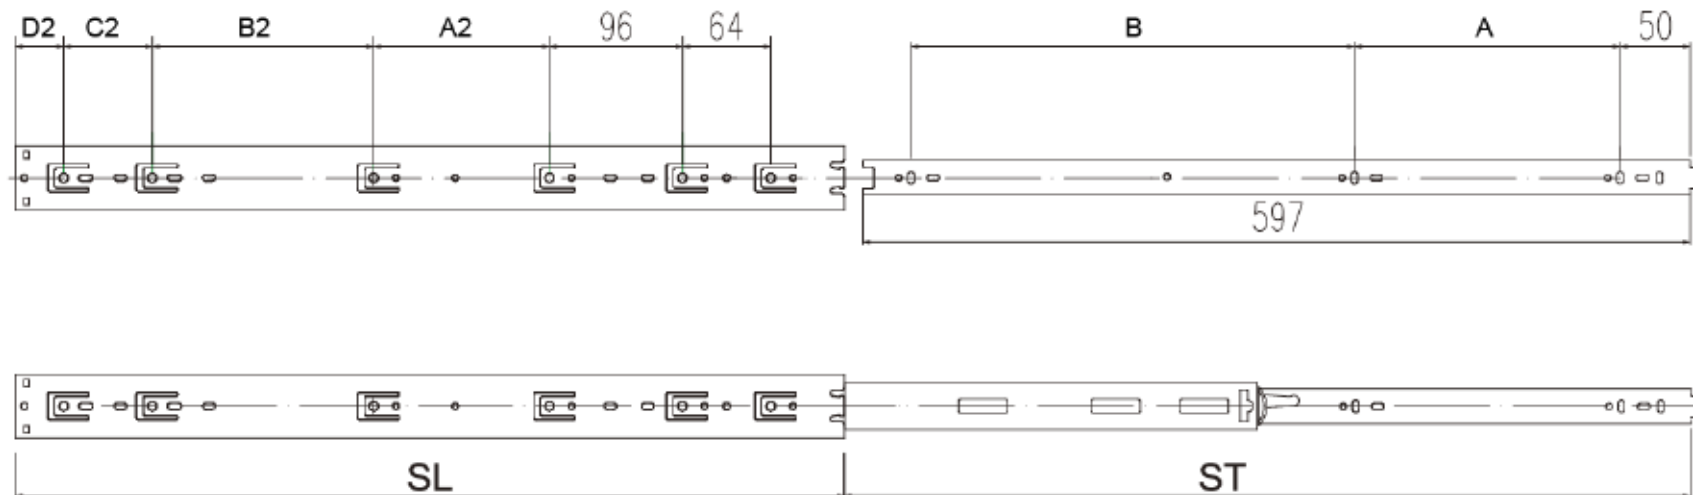

**NOTES:**

1. Length: 350mm to 500mm (14" to 20")
2. Travel: Full Extension
3. Max. Loading: 45 kg (100 lb)
4. Mount: Side Mount
5. Disconnect: Lever Disconnect
6. Finish: Clear Zinc or Black
7. Material: Cold Rolled Steel
8. Packing: Unit Packed in 15 pairs/carton



|              |             |             |                    |           |
|--------------|-------------|-------------|--------------------|-----------|
| Part Number: | Series GT48 | Drawn by:   | Date:              | Material: |
| Description: |             | Checked by: | Projection Method: | Finish:   |

This drawing and any information or descriptive material set out on it are the confidential and copyright property of TOOL & TECH INTERNATIONAL CO., LTD.